

SPECIFICATIONS – MOTOR PUMPS: PB18-G2015

Enhance Your Wildland/Attack Fire Suppression Capabilities



Designed for wildland/attack fire suppression, the rugged and powerful Waterous PB18-G2015 is a gear-driven centrifugal pump powered by a V-twin Briggs and Stratton® 18 HP engine that delivers from 20 GPM @ 320 PSI (80 L/min @ 22 bar) to 75 GPM @ 190 PSI (290 L/min @ 13 bar). The PB18-G2015 also comes with a two-year warranty and is CE marked*.

NOTE: PB18-G2015 models equipped with Wrap-Around Bases are CE Marked.

Pump Specifications:

Type: Wildland - Attack

Gear Case:

Two-gear speed increaser utilizing high-strength aluminum alloy case, helical cut, hardened steel gears and anti-friction bearings.

Intake: 2 inch female NPT, Optional 2 in. BSP (Straight) available

Discharge: Ball valve with 1-1/2 inch female NPT (G2015B)
1-1/2 inch female NPT, no ball valve (G2015F),
Optional 1-1/2 in. BSP (Straight) available

Console:

Operator's panel includes discharge pressure gauge, compound intake pressure gauge, low oil pressure warning light, start and stop control, speed control panel light and 12 volt outlet.

Optional: Panel with compound gauge with expanded vacuum scale.

Volute Body and Head:

High-strength aluminum alloy, anodized for superior corrosion resistance.

Impeller:

High-strength, corrosion-resistant bronze, fully-enclosed, double-hubbed to balance hydraulic thrust, mechanically balanced to eliminate vibration.

Wear Rings:

Long wearing bronze. Easy to replace when required to restore original pump efficiency.

Shaft Sleeve:

High-strength stainless steel.

Shaft Seal:

Spring-loaded mechanical type.

Priming:

Combination spark arresting muffler and exhaust primer, fast and easy to use. Quarter turn bronze priming valve operates with push/pull knob. Standard on wrap-around. Optional on no base and rail base.

Engine Specifications:

Engine:

Briggs & Stratton, model 356447, Vanguard V-Twin air cooled, overhead valve (OHV) design delivers a maximum output of 18 HP (13.4 kW) @ 3600 RPM. 34.75 cu. in. (570 cc) displacement, 4-cycle, gasoline fueled, horizontal shaft.

Lubrication:

Full pressure lubrication system with an automotive style oil filter. Oil fill tube with dipstick.

Starter:

12-volt electric and manual recoil.

Alternator:

16 A



Bases:

Rail (Standard):

Rigid steel channels. Control panel and fuel tank shipped loose.

No Base (Optional):

Control panel and fuel tank shipped loose.

Available for use outside USA and Canada:

Wrap-Around (Optional):

Tubular steel design to protect pump and engine from roll over damage. Swing away handles with vinyl grips that lock in either carry or stowed position. Includes control panel, battery tray and integral fuel tank with fuel level gauges. Optional mast light is available.

Fuel Tank:

Rail or No Base Models:

All PB18 models (except PB18-LE) with Rail or No Base will have a shipped-loose, 3-gallon (11 liter) fuel tank that meets the EPA evaporative requirement (40 CFR Part 1060).

Wrap-Around Base Models (not available in the USA or Canada):

PB18 models with Wrap-Around Base will have an integral 3-gallon (11 liter) fuel tank with fuel level gauge.

RAISING THE BAR ON INNOVATION, RELIABILITY AND SERVICE


SPECIFICATIONS – MOTOR PUMPS: PB18-G2015

Approximate Dimensions and Weights

Base Type	Length (in/cm)	Width (in/cm)	Height (in/cm)	Dry Weight (lb/kg)	Ship Weight (lb/kg)
Rail	22-3/4 (57.8)	19 (48.3)	20 (50.8)	120 (54.4)	148 (67.1)
Wrap-Around	31 (78.7)	20-1/2 (52.1)	21-1/2 (54.6)	152.5 (64.6)	178 (80.7)
No Base	22-1/2 (57.1)	19 (48.3)	19 (48.3)	108 (49.0)	136 (61.7)

Performance Curve

MAXIMUM FULL THROTTLE PERFORMANCE PB18-G2015

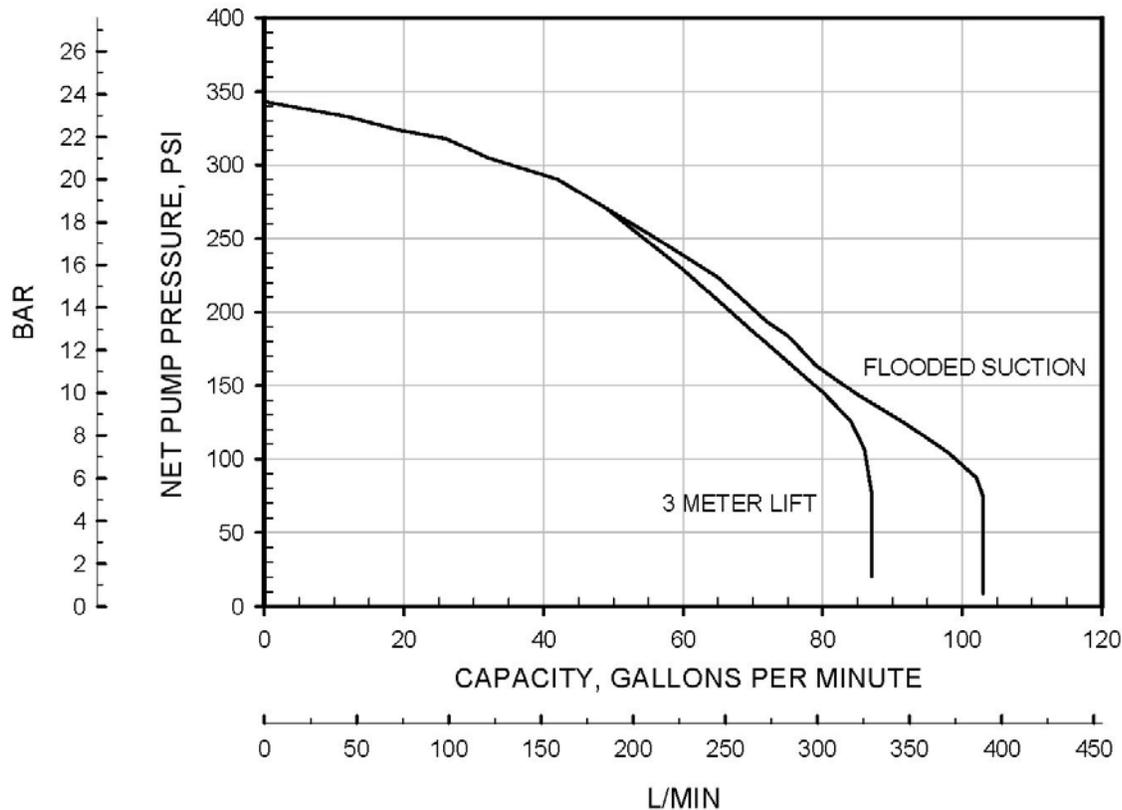

Industry-Leading Sales and Support

When you purchase Waterous equipment, not only do you get quality products, you get quality service. Our expert service technicians are the best in the business and they are always happy to answer any service questions you might have.

Sales/Applications Assistance
 Phone: 651-450-5234 (Press 3)
pumpsales@waterousco.com

Service Assistance
 Phone: 651-450-5200
 Fax: 800-488-1228
service@waterousco.com