




HVAC&R MARINE SYSTEMS



CHILLER

## OUR QUALITY POLICY

Air conditioning is a process which heats, cools, cleans and cycles the air and it continuously controls the humidity content of the environment. Today it is seen that humans give great importance to air conditioning systems and their qualities in order to live more conveniently and efficiently. Our firm which performs activities on marine HVAC systems follows closely the continuously changing air – conditioning, ventilation and heating technologies and with the procurement of design, project engineering, site installation, application, commissioning and all spare parts, we present HVAC systems which became an inseparable part of ships and yachts to our customers by targeting mainly the comforting conditions. Yachts, commercial ships, vessels, ferries, passenger boats and torpedo boats giving military service are our working fields. Our projects are planned with years of experience and by our expert staff. HVAC system productions are supported by high technologies using our own software. The systems are designed by being sensitive to the human and environmental health and giving great importance to our purpose of low energy usage and maximum efficiency. We establish systems which have integrated our special productions designed for our customers needs. We support technical documents, all engineering drawings to our customers.

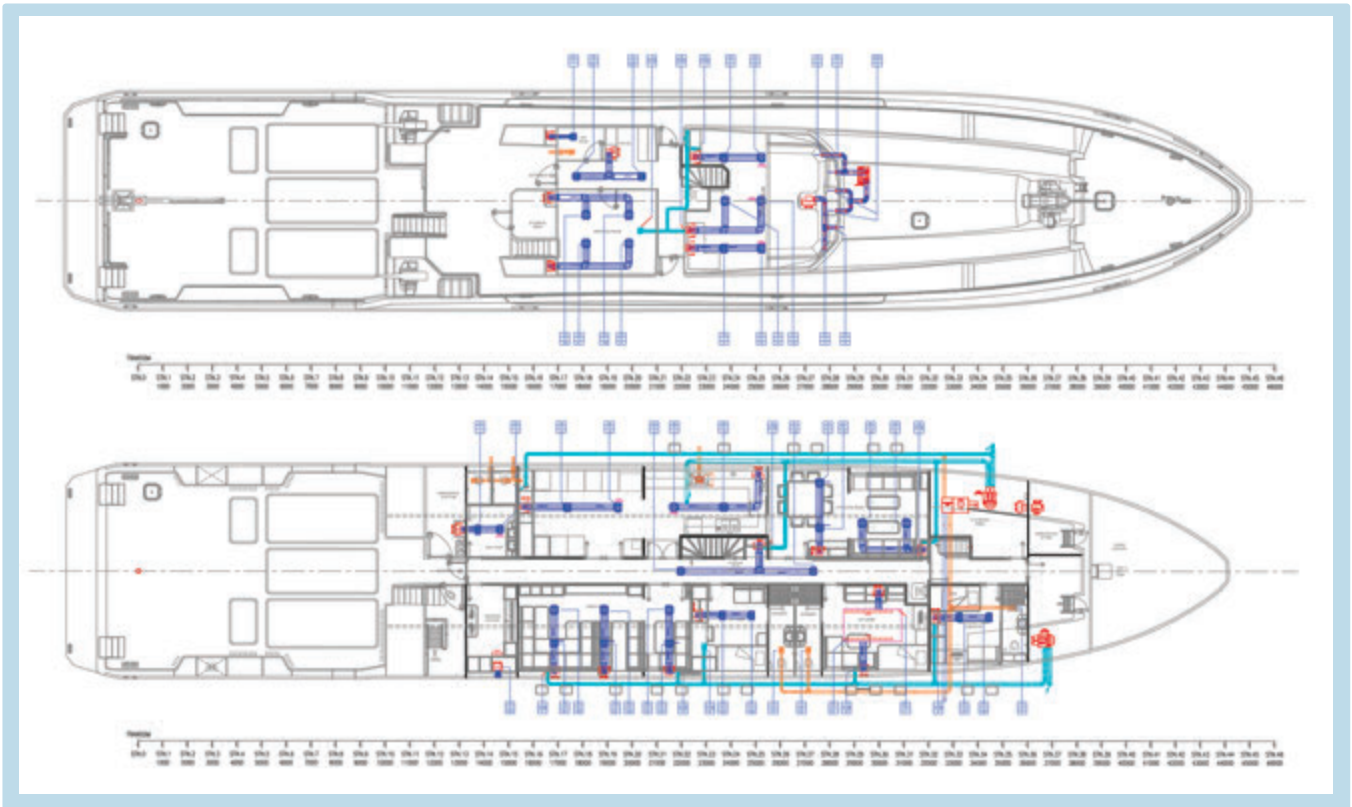

## MAC SERIES



Our chiller systems are within two different groups by modular and single body models. Our modular chiller units have various advantages such as easiness for installation, maintenance and repair and occupying a small place in the boats. Minimum loss of power, maximum performance and rapid cooling-heating can be ensured thanks to stainless plate heat exchanger in its hardware. It displays a great resistance to marine conditions for years by its chromium-nickel body and connectors (quality 304) and copper-nickel alloyed condenser. In addition to three water sensors, the system was fully protected by high-low gas pressure protection, water flow check and freezing sensor. It provides operation under most appropriate conditions by its control system (manufactured by Carel-Danfoss), wide programming range and temperature sensors. In addition to our standard manufactures, specially tailored chiller units aiming to avoid installation place problems are projected and provided for our customers.

### CHILLER UNIT - SINGLE COMPRESSOR

MODEL NO	CAPACITY	Power Supply	Operating Current*	LRA **	Power Consumption	Sea Water Flow	Chiller Water Flow
	( Btu/h )		( A )	( A )	( KW )	( Lt/min )	( Lt/min )
MAC 024 S1	24.000	230V/1Ph/50Hz	7,5	56	1,7	26	25
MAC 030 S1	30.000	230V/1Ph/50Hz	7,8	66	1,8	32	28
MAC 030 S3	31.000	400V/3Ph/50Hz	3,3	39	1,75	32	28
MAC 036 S1	36.000	230V/1Ph/50Hz	9,8	83	2,2	36	32
MAC 036 S3	36.000	400V/3Ph/50Hz	4,46	45	2	36	32
MAC 044 S3	44.000	400V/3Ph/50Hz	4,6	41	2,4	42	38
MAC 050 S3	50.000	400V/3Ph/50Hz	5	53	2,7	45	42
MAC 060 S3	60.000	400V/3Ph/50Hz	6,8	82	3,4	60	58
MAC 072 S3	72.100	400V/3Ph/50Hz	8,55	87	3,9	70	65
MAC 083 S3	83.300	400V/3Ph/50Hz	9,9	100	4,6	80	68
MAC 090 S3	92.000	400V/3Ph/50Hz	10,5	98	5,2	88	75
MAC 100 S3	107.000	400V/3Ph/50Hz	13,2	142	6,3	104	98
MAC 120 S3	121.000	400V/3Ph/50Hz	13,8	142	6,8	122	116
MAC 140 S3	140.000	400V/3Ph/50Hz	15,55	147	7,8	130	120

### CHILLER UNIT - DUAL COMPRESSOR

MODEL NO	CAPACITY	Power Supply	Operating Current*	LRA **	Power Consumption	Sea Water Flow	Chiller Water Flow
	( Btu/h )		( A )	( A )	( KW )	( Lt/min )	( Lt/min )
MAC 048 D1	48.000	230V/1Ph/50Hz	15	56	3,4	52	50
MAC 060 D1	60.000	230V/1Ph/50Hz	15,6	66	3,6	64	56
MAC 060 D3	62.000	400V/3Ph/50Hz	6,6	39	3,5	64	56
MAC 072 D1	72.000	230V/1Ph/50Hz	19,6	83	4,4	72	64
MAC 072 D3	72.000	400V/3Ph/50Hz	8,92	45	4	72	64
MAC 088 D3	88.000	400V/3Ph/50Hz	9,2	41	4,8	84	76
MAC 100 D3	100.000	400V/3Ph/50Hz	10	53	5,4	90	84
MAC 120 D3	120.000	400V/3Ph/50Hz	13,6	82	6,8	120	116
MAC 144 D3	144.200	400V/3Ph/50Hz	17,1	87	7,8	140	130
MAC 166 D3	166.600	400V/3Ph/50Hz	19,8	100	9,2	160	136
MAC 180 D3	184.000	400V/3Ph/50Hz	21	98	10,4	176	150
MAC 200 D3	214.000	400V/3Ph/50Hz	26,4	142	12,6	208	196
MAC 240 D3	242.000	400V/3Ph/50Hz	27,6	142	13,6	244	232
MAC 280 D3	280.000	400V/3Ph/50Hz	31,1	147	15,6	260	240

- Capacities are designed at 7 °C evaporation and 38 °C condensation temperature conditions.

- Operating Current (A) \*: The amps are given at 7 °C evaporation and 38 °C condensation temperature conditions of compressor manufacturer selection programs.

- LRA (A) \*\*: Amperage value of 1(one) compressor.

- All models have heat pump heating system.

Technical Specifications and sizes to change without notice.

# MAC SERIES



## CHILLER UNIT - TREE COMPRESSOR

MODEL NO	CAPACITY	Power Supply	Operating Current*	LRA **	Power Consumption	Sea Water Flow	Chiller Water Flow
	( Btu/h )		( A )	( A )	( KW )	( Lt/min )	( Lt/min )
MAC 072 T1	72.000	230V/1Ph/50Hz	22,5	56	5,1	78	75
MAC 090 T1	90.000	230V/1Ph/50Hz	23,4	66	5,4	96	84
MAC 090 T3	93.000	400V/3Ph/50Hz	9,9	39	5,25	96	84
MAC 108 T1	108.000	230V/1Ph/50Hz	29,4	83	6,6	108	96
MAC 108 T3	108.000	400V/3Ph/50Hz	13,38	45	6	108	96
MAC 132 T3	132.000	400V/3Ph/50Hz	13,8	41	7,2	126	114
MAC 150 T3	150.000	400V/3Ph/50Hz	15	53	8,1	135	126
MAC 180 T3	180.000	400V/3Ph/50Hz	20,4	82	10,2	180	174
MAC 216 T3	216.300	400V/3Ph/50Hz	25,65	87	11,7	210	195
MAC 250 T3	250.000	400V/3Ph/50Hz	29,7	100	13,8	240	204
MAC 270 T3	276.000	400V/3Ph/50Hz	31,5	98	15,6	264	225
MAC 300 T3	321.000	400V/3Ph/50Hz	39,6	142	18,9	312	294
MAC 360 T3	363.000	400V/3Ph/50Hz	41,4	142	20,4	366	348
MAC 320 T3	420.000	400V/3Ph/50Hz	46,65	147	23,4	390	360

## CHILLER UNIT - FOUR COMPRESSOR

MODEL NO	CAPACITY	Power Supply	Operating Current*	LRA **	Power Consumption	Sea Water Flow	Chiller Water Flow
	( Btu/h )		( A )	( A )	( KW )	( Lt/min )	( Lt/min )
MAC 096 F1	96.000	230V/1Ph/50Hz	30	56	6,8	104	100
MAC 120 F1	120.000	230V/1Ph/50Hz	31,2	66	7,2	128	112
MAC 120 F3	124.000	400V/3Ph/50Hz	13,2	39	7	128	112
MAC 144 F1	144.000	230V/1Ph/50Hz	39,2	83	8,8	144	128
MAC 144 F3	144.000	400V/3Ph/50Hz	17,84	45	8	144	128
MAC 180 F3	176.000	400V/3Ph/50Hz	18,4	41	9,6	168	152
MAC 200 F3	200.000	400V/3Ph/50Hz	20	53	10,8	180	168
MAC 240 F3	240.000	400V/3Ph/50Hz	27,2	82	13,6	240	232
MAC 288 F3	288.400	400V/3Ph/50Hz	34,2	87	15,6	280	260
MAC 330 F3	333.200	400V/3Ph/50Hz	39,6	100	18,4	320	290
MAC 360 F3	268.000	400V/3Ph/50Hz	42	98	20,8	352	330
MAC 400 F3	428.000	400V/3Ph/50Hz	52,8	142	25,2	416	392
MAC 480 F3	484.000	400V/3Ph/50Hz	55,2	142	27,2	488	464
MAC 560 F3	560.000	400V/3Ph/50Hz	62,2	147	31,2	520	480
MAC 630 F3	630.000	400V/3Ph/50Hz	64,8	158	34,5	585	540
MAC 720 F3	720.000	400V/3Ph/50Hz	74,8	170	39,3	670	620

- Capacities are designed at 7 °C evaporation and 38 °C condensation temperature conditions.

- Operating Current (A) \*: The amps are given at 7 °C evaporation and 38 °C condensation temperature conditions of compressor manufacturer selection programs.

- LRA (A) \*\*: Amperage value of 1(one) compressor.

- All models have heat pump heating system.

Technical Specifications and sizes to change without notice.

# CONTROL SYSTEMS



CM-MPC-30 LCD



CM-MPC-20 LCD



CM-MPC-11



CAREL CHILLER CONTROL



DANFOSS CHILLER CONTROL



CM-MPC-12

## SYSTEM & INSTALLATION



**Ankastre Kontrol**

Geniş renk seçeneği, biçimi ve çizgileriyle zamana meydan okuyan Vimar, çerçevelerin kullanıldığı ankastre kontroller kolay kullanımı, programlanabilir özelliği ile mekanlara şıklık ve fonksiyonelliği bir arada sunmaktadır.

**Fan Gövdesi**

Hava kanallarının döşenmesinde montaj esnekliği sağlamak amacıyla dizayn edilmiş 0 - 90 derece arasında dönebilen fan gövdesi.

**Krom Kabinet**

Yuvarlak hatlı dizaynı ile oluşturulan krom kabinet kompresör sesini kendi gövdesi içerisinde hapseder ayrıca dış darbelerle karşı mekanik ve elektrik donanımını korur.

**Kondenser**

İç boru 90/10 Bakır - Nikel alaşımı, dış boru bakır olarak dizayn edilen Coolmar marin kondenserlerimiz uzun yıllar deniz suyuna dayanıklılık özelliği ile dünya standartlarındadır.

**Evaporatör**

Üretimimizde kullanılan evaporatörlerimiz, asitli ortamlar ve deniz şartlarına uzun yıllar dayanıklı mavi renkli hidrofilik epoxy alaşım ile kaplıdır ve üzerinde su tutmaz.

**Build-in Control**

The control panel covered with Vimar, Idea, Rondò frames having alternative ranges of color, style and desing features and endurance against time, provide for both elegance and functionality in your residences.

**Blower Housing**

The housing blower designed to rotate between 0 - 90 degrees ensure flexibility on assembling and locating the ducted units.

**Chromium Cabinet**

Elegantly designed curved chromium cabinet blocks the sound of the compressor and secures protection of the mechanical and electrical parts therein from outside strokes and damages.

**Condenser**

Our Coolmar marine condensers; as a reputable brand meeting word standards; are desinged with 90 / 10 copper / nickel alloy inside the pipes and 100% copper on the outside; provide long endurance and resistance to sea water for many years.

**Evaporator**

Our evaporators are coated with blue hydrophilic epoxy paint which provides high resistance to sea water and acidic conditions. Hydrophilic paint supports the water drops to drain easily and prevents air dust to stick on the evaporator.

**Beş Farklı Çalışma Modu**

Klimamızın soğutma, ısıtma, otomatik, fan, nem alma fonksiyonlarında çalışabilecek beş farklı çalışma modu bulunmaktadır.

**Otomasyon**

Klimamızın otomasyon sistemlerinde kullanılan en son nokta can bus otomasyon yazılımı ile tek merkezden sistemdeki tüm klimaların kontrolü yapılabilmektedir.

**RS 485**

RS 485 veri yolu iletişimi ile display ve anakart arası hatasız ve hızlı veri transferi sağlanabilmektedir.

**Gaz Basınç Kontrolü**

Sistemin çalışmasını olumsuz yönde etkileyecek kritik gaz basınç değerlerini, direk anakart üzerinde takılı basın kontrol ekipmanları ile kontrol edilmektedir.

**Deniz Suyu Pompası Kontrolü**

Deniz suyu pompası klimanın çalışmasından altı saniye önce devreye girer. Klimanın durmasından altı saniye sonra devreden çıkar. Bu kontrol anakart üzerinden programlama ile sağlanmaktadır.

**Gece Modu**

Yatak odaları için düşünülmüş gece modu, bedenimizin uyku halindeyken soğuk yada sıcak hava sıcaklıklarından rahatsızlık duymaması için, oda sıcaklığını programa göre otomatik değiştirerek, gece boyunca konforlu bir ortam yaratmaktadır.

**Gözlem**

Ekranda klimamızın donanımındaki tüm elektrikli parçalara ve deniz suyu pompasına ait sekiz adet özel simge yer almaktadır. Bu simgeler o an hangi elektrikli parçanın devrede olduğunu göstermektedir.

**Elektrik Kesintisi Sonrası Otomatik Çalışma Fonksiyonu**

Enerji kesilmesinde, önceden seçilmiş program, enerji tekrar geldiğinde hiçbir değişikliğe uğramadan ve yeni programlama gerektirmeden otomatik olarak çalışmaya başlar.

**Otomatik Fan Hız Ayar**

Oda sıcaklığına göre ve oda içinde rahat bir hava akımı sağlamak amacıyla mikro işlemci uygulamalı ve 3 aşamalı fan hız ayarı. (Isıtma fonksiyonunda 4. aşama olarak başlangıç hava hızı devri)

**Otomatik Sıcaklık Kontrolü**

Oda sıcaklığını ölçerek arzu edilen sıcaklık derecesi elde edilene kadar klimamız çalışmayı sürdürür. Hava şartları ne olursa olsun, iç ortamdaki sıcaklığı sabit düzeyde tutarak konforlu bir ortam sağlar.

**Otomatik Arıza Bildirme**

Dijital Termostat üzerindeki ekranda arıza kodları yanıp sönerek hangi bölümünde olduğunu otomatik olarak gösterir ve onarımda büyük kolaylık sağlar.

**12 Saat on/off Programlama**

12 saatlik zaman birimi içinde bu ayar modunu kullanarak klimanızı istediğiniz an açip istediğiniz an kapatabilecek şekilde programlayabilirsiniz.

**3 Dakika Otomatik Emniyet Fonksiyonu**

Ani elektrik kesilmelerinde 3 dakika otomatik emniyet fonksiyonu devreye girerek kompresör ve diğer donanımların zarar görmesini engeller.

**Soğutma / Isıtma**

Sağlık koşullarına uygun ideal soğutma sağlayarak, ısı pompası özelliği ile de 5°C üzerindeki deniz suyu sıcaklığında çok ekonomik ısıtma sağlar.

**Krom**

Klimamızın üretiminde bağlantı elemanları (vida, somun, pul v.b.) dahil, tamamında 304 Kalite krom-nikel malzeme kullanılmıştır.

**Fan Hız Kontrolü**

Klimanın kapasitesini olumsuz yönde etkileyecek, hava debisinin fazla yada az olduğu özel durumlarda display de programlama menüsünden rakamsal değerlerde seçim yapılarak hava hızı artırılabilir yada azaltılabilir.

**Çift oda sensörü**

Lcd display ve anakart üzerindeki sensörlerin her ikisiyle de oda sıcaklığı kontrol edilebilir. Sensörlerin seçimi menüdeki parametrelerden yapılır. Fabrika ayarı olarak display sensörü seçilirdir.

**LCD ekran ışık parlaklığı**

Lcd ekranın ışık şiddetini dilerseniz sürekli tam açık dilerseniz 45 sn sonra otomatik olarak %65 oranında azalacak şekilde ayarlanabilir

5M

C

485

HPS  
LPS

▶

★

👁️

⚡

AUTO

🌀

AUTO

🌡️

🔧

🕒

3

min.

❄️

Cr

FAN  
SPEED

DS

🖨️

AUTO

**Five Different Operating Mode**

Our air conditioning units operate at five different modes; cooling, heating, automatic, fan and moist taking modes.

**Automation**

Canbus automation software installed on our systems as the last control point for its operations enable the control of all units in the system from the main center.

**RS 485**

It is possible to enable direct data transfer between the display and the main card by the RS 485 data transfer faster without mistakes.

**Gas Pressure Control**

The pressure control equipments installed directly on the main card enables control of the critical gas pressure values which may have negative effect on the operations of the system.

**Water Pump Control**

Water pump control is activated six seconds before the unit starts operating. It stops only six seconds after the unit stops. This control is ensured by the programming utility on the main card.

**Night Mode**

This mode is to operate at sleeping mode for the bedrooms, providing comfort for our bodies during sleeping periods by changing room temperature automatically as programmed previously.

**Observation**

On the display of our units there are eight special symbols shown each indicating the different electrical components and the sea water pump installed within. These symbols indicate each electrical component currently active on the circuit (cycle)

**Automatic Restart Function After Power Failures**

On power failure previously selected automatic programs restart unchanged, soon after the power failure is over without any further need for reprogramming.

**Automatic Fan Speed Setting**

The fan speed is set at three phases automatically by micro processing applications in order to enable heating at room temperature levels and to provide comfortable air flow within. (At the heating mode, there is a fourth phase for rotating the fan at air speed during starting.

**Automatic Heating Control**

Our marine airconditioners continue to operate until the desired heating level is reached by measuring the room temperature automatically. Regardless of the weather conditions outside, they will keep the comfort inside at a constant level.

**Automatic Failure Notification**

The display on the digital thermostat alerts automatically the failures on any part of the body by blinking coded error messages, simplifying the detection of the failure that needs to be fixed.

**12 Hours on/of Programming**

It is possible to adjust your unit with this programming mode to restart and stop at any desired time within a 12 hours time interval.

**3 Minutes Automatic Security Function**

This function will be automatically in effect for a 3 minutes time interval upon any unexpected powercuts, keeping your compressors and other parts at utmost security from malfunctioning and damages.

**Cooling/Heating**

Provides not only the ideal healthy cooling but also the most economic heating with the heat pump at above 5 C sea water temperature.

**Chromium**

All the fixing elements and accessories (such as screws, bolts etc) used during the production of our units are made from chromium material.

**Fan Speed Control**

On the special conditions of having too much or inadequate air flows which may have negative effect on the units operations. The numeric values on the programming menu of the display can be altered by selecting the proper air flow values enabling increase or decrease of the current flow.

**Double room sensor**

Room temperature can be controlled with both of the sensors at the LCD display and the main card. Selection of sensors can be done by following the parameters on the menu. Factory set Unit will have display sensor initially.

**LCD display light setting**

You can adjust the light strenght of the LCD display from full open to %65 less automatically if you wish, or keep it fully open as it is.



[www.coolmar.com.tr](http://www.coolmar.com.tr)