



PENRITE



FLEET-GEAR 30 (SAE 30)


Package, Code and Carton Qty:

20L - FG30020 []

205L - FG30205 []

1000L - FG301000LTR []

Fleet Gear 30 is a multipurpose heavy duty, transmission, hydraulic and final drive oil manufactured from highly refined mineral oils and selected additives to provide excellent performance in a wide range of equipment in both on and off highway service.

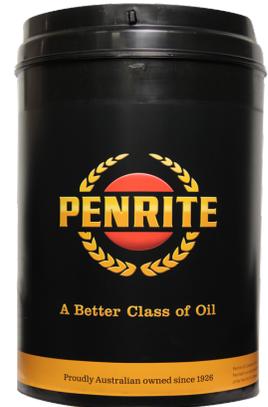

Application

Fleet Gear 30 is recommended for use in all Caterpillar transmissions that require SAE 30 grades, Komatsu Powershift and Allison (except W Series) transmissions in severe service or high ambient conditions. It is ideal for use in transmissions that require API CD or CF/SAE 30 oils and in Caterpillar/Komatsu final drives that require SAE 30 grades.

Fleet Gear 30 has extremely high load carrying ability to protect heavily loaded gears and bearings. In addition it also provides controlled friction to assure quick lock up of clutches and discs in power shift transmissions. This reduces heat and wear.

Fleet Gear 30 is completely compatible with all transmission materials.

Product Benefits:

Wide application range allows for rationalisation of products

Longer equipment life

Designed for heavier load than engine oils

Longer oil life through enhanced oxidation stability

Minimises degradation of equipment

Industry Specifications

API GL-3

API CF (where specified for transmissions)

Allison C4

PENRITE OIL COMPANY PTY LTD, 88 LEWIS ROAD, WANTIRNA SOUTH
VICTORIA AUSTRALIA 3152, ABN 25 005 001 525
Enquiries: Phone: +61 3 9801 0877
Website: www.penriteoil.com, Email: penrite@penriteoil.com

PROUDLY AUSTRALIAN
FAMILY OWNED
SINCE 1926





PENRITE



Caterpillar TO-4

Komatsu

ZF TE-ML01

ZF TE-ML03

Typical Data

Colour Amber

SAE GRADE 30

Density at 15°C, kg/L 0.875

Viscosity, Kinematic, cSt at 40°C at 100°C 9311.5

Viscosity Index 112

Zinc, mass % 0.109

Phosphorus, mass % 0.092

Information in this sheet is based on recent production. Minor variations to typical properties are expected in normal manufacture and do not affect product performance. An MSDS is available on request.

PENRITE OIL COMPANY PTY LTD, 88 LEWIS ROAD, WANTIRNA SOUTH
VICTORIA AUSTRALIA 3152, ABN 25 005 001 525
Enquiries: Phone: +61 3 9801 0877
Website: www.penriteoil.com, Email: penrite@penriteoil.com

PROUDLY AUSTRALIAN
FAMILY OWNED
SINCE 1926

